




5327 Cedar Creek Drive
Kemp, Texas 75143
Toll Free: 866-301-CCTV
Phone: 903-498-3240
Fax: 903-498-8989
website: www.rugged-cctv.com
email: sales@rugged-cctv.com

RMI16

16 Channel Interface Adaptor

Description

Powers up to 16 RM1 series microphones and distributes their audio outputs to individual RCA (or optional 3.5mm) jacks. Designed for connecting Rugged microphones to equipment with un-balanced, line level inputs.

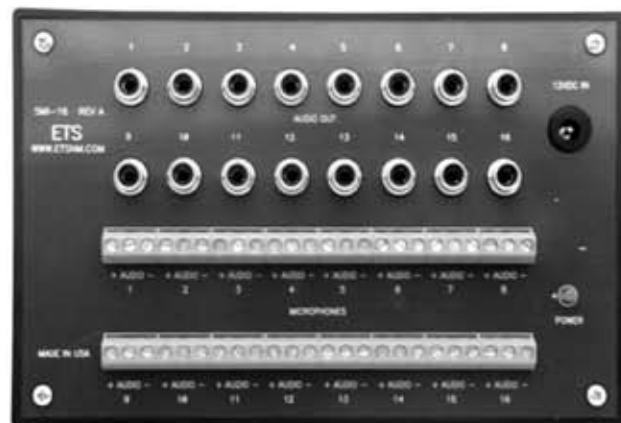

Includes

- RMI16 Interface adapter
- 12 V DC AC adapter
- Sixteen 3' RCA or Eight 3' 3.5mm patch cables.

Options

- Specify: RCA output connectors or 3.5mm.

Wiring Requirements

- Stranded 22-gauge, 2-conductor shielded cable.
Distances up to 1500'.

RMI16 Interface Adapter Specifications

- Standard RCA or 3.5mm jacks for connection to DVRs, CCTV monitors with built in speakers, etc.
- Easy cable run terminations
- LED power indicator
- Power: 12V DC @ 160mA
- Reverse polarity protected and fused
- Dimensions: W 3.25 x L 5.2 x H 1.56

Caution

It is the responsibility of the installation company and end user to comply with state and federal privacy laws regarding the use of audio surveillance equipment. If you are unfamiliar with these laws, consult a qualified attorney. In most cases, posting the provided warning labels in plain view is all that is required.

Warranty

1 year parts and labor.