

Faceplate Camera

- Low Profile Surface Mount
- Excellent Facial Recognition
- Super Wide Angle
- Great COLOR Picture





Model # FPCC


Specifications

Model Name	FPC & FPCC	
Signal System	NTSC	PAL
Image Sensor	1/3" SONY SUPER HAD CCD	
Total Pixels	537 (H) x 505 (V)	537 (H) x 597 (V)
Effective Pixels	510 (H) X 492 (V)	500 (H) x 582 (V)
Horizontal Resolution	380 TV Lines	
Electronic Shutter	1/60-1/100,000(sec) automatic	1/50-1/100,000(sec) automatic
S/N Ratio	More Than 45dB (AGC OFF)	
Sensitivity	0.5Lux/F2.0 (30IRE)	
Sync System	Internal	
Gamma Correction	$\gamma=0.45$	
Video Output	1 [Vp-p] Composite 75 Ω unbalanced	
Current consumption	120mA or less	
Input Power Source	DC12V (+- 10%)	
Operating Temperature	-10 $^{\circ}$ C - + 50 $^{\circ}$ C	
Door View Lens	f1.78mm	
Water Resistant	IP67	
Dimension	19mm	


FPCC Camera Schematic



Mount Schematic



CABLE CONNECTIONS

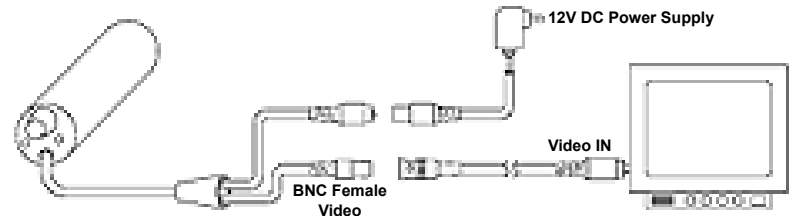

201 North Elm Street • Kemp, Texas 75143

Toll Free: 1-866-301-CCTV • Phone: 903-498-3240 • Fax: 903-498-8989

Website: www.rugged-cctv.com • email: techsupport@rugged-cctv.com