

RUGGED CAMS

By Rugged CCTV

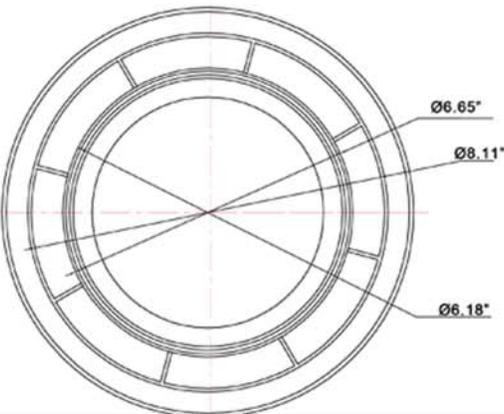
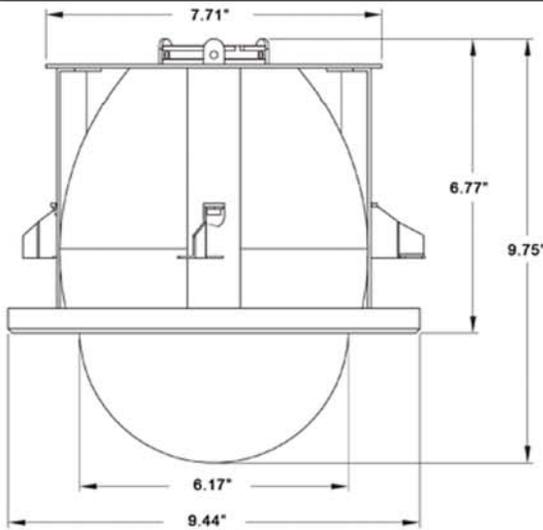


Image Sensor	1/4" Sony Exview HAD CCD
Pixels	440K(752H×582V)
Horizontal Resolution	540TVL
S/N Ratio	>50dB
Min. Illumination	1.4Lux(F1.6)
White Balance	AWB/ATW/Manual
BLC	On/Off
Sync. System	(V-LOCK)Internal/ external
Zoom Ratio	optical 36X,digital 12X
Focal Length	3.4~122.4mm Lens
F-value	F1.6~F4.5
Angle of View	57.8° (W)~1.7° (T)
Video Output	VBS:1.0Vp-p,Y/C
Language	Chinese, English, French, German, Italy, Portuguese, Spanish, Polski
Pan/Tilt Range	360° continuous pan, 0~95° tilt with 'AUTO FLIP'
Pan/Tilt Speed	Manual Speed 0.1° ~160° /s, preset speed 360° ~540° /s
Tilt Range	75° ~95°
Preset	220, preset accuracy ±0.1°
Sequence	4 sequences, 32presets/sequence
Pattern	4 patterns, The time more than 180 seconds of per record
Panning	4panning routes
Clock &Timing	System clock, Can set 8 time period, timer running preset etc.
Title Indication	Title of dome, preset, region etc.
Privacy mask	4~24 mask window, On/Off
Alarm	7 inputs, 2 outputs, linkage preset, pattern etc.
Communication	RS485/422, Multiple Protocol/Coaxial, AD, Philips etc.
Protocol	Factory, AUTO, Pelco, P&D&C, Emitec, BI-PHASE, AD etc.
Baud Rate	AUTO, 2400/4800/9600/19200bps
Address Area	1~254, Hard ID, Programmable ID, Broadcast ID
Fan&heater	6500R/min, temperature control point 0℃ ±5℃
Protection Grade	4000V Surge Protection
Operating Temperature	14°F ~ +140°F
Environment Humidity	0 ~95%
Power Supply	AC24V, 50Hz/60Hz
Dimensions	5.91" x 9.65" x 10.43"

© Rugged Cams® are manufactured by Rugged CCTV. All rights reserved.

866-301-2288

www.ruggedcams.com